

Front View

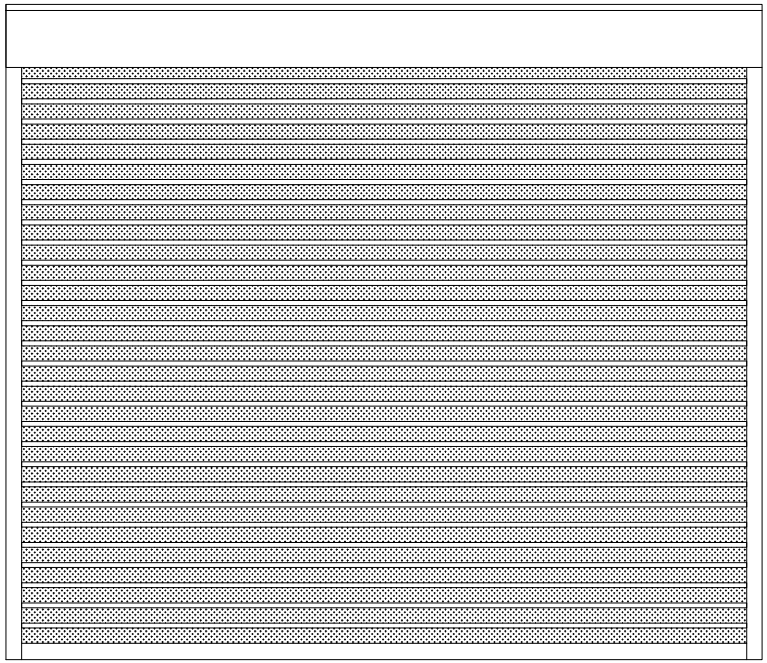


Width subject to final site inspection

Side View

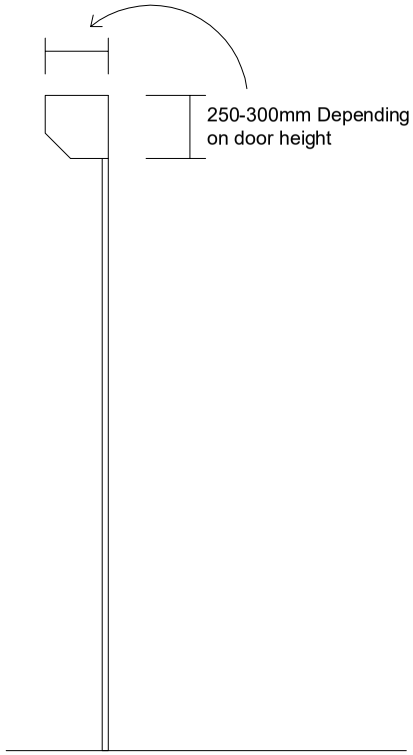

Top View

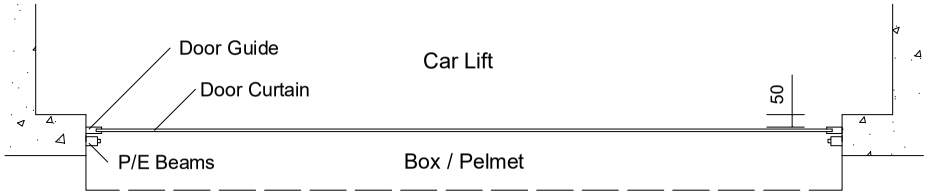

Note: Drive in width 125mm less than opening

SPECIFICATIONS

Size

Each individual Series I roller shutter can be manufactured up to a maximum height of 4500mm, width of 4500mm, or a total of 1 3 square metres.

Curtain

The curtain is manufactured by alternating and Interlocking 60mm x I .5mm solid or perferated aluminium slats with 20mm extruded aluminium slats, in 6063-T5 alloy to form a continuous hinge. Each joining slat is fitted with moulded nylon end clips to prevent lateral movement and provide a smooth and quiet operation inside the side guides.

Bottom Rail

The bottom rail of the shutter is manufactured from an extruded aluminium section 65mm x I Omm which shall encase a locking device if required

Optional felt brush available.

Locking

The bottom rail houses a keyed centre lock within the extrusion. This operates 1 5mm x 2mm aluminium flat bars which, when in the locked position, secure into the side guides on both sides of the opening. The standard locking position allows for double sided lock with operation from both Inside and out. Locking installed on manual shutters only.

The guides are manufactured from extruded aluminium sections 62mm deep x 25mm wide.

Optional felt brush available.

Pelmet boxes

All Series I roller shutters come enclosed in a pelmet box as standard. Pelmet boxes range In size from 1 65mm to 250mm.Any shutter over 1 800mm wide or high will come automatically in a 250mm pelmet.

Maximum heights can be found in the table below.

Axle

The Series I roller shutters are mounted on either a 60mm or 70mm octagonal axle with expansion rings to aid in smooth operation.The 60mm axle is fitted with 80mm rings and the 70mm axle can be fitted with either 100mm or 130mm rings, dependent on the size of the shutter.The axle is fitted with either helical coil springs designed to counterbalance the curtain weight throughout it's full operation, or a tubular motor for electric operation.

Operation

Manual operation, simply push up and pull down with supplied pull pole. Doors can be electrically motorised with various push button, remote control or key switch operation.

Finish

Series I Roller Shutters come Anodised as standard. (additional fee to powder coat pelmet box to match) Interpon or dulux powder coating is also available for an additional fee.

PROJECT: Credence ADDRESS: 34 Grosvenor st, Neutral Bay	PRODUCT: Roller Shutter COLOUR: TBC	SCALE: NTS DRAWN: Dion	REP: John DATE: 25/02/2025	PH: 02 9534 0400 12 Larkin St, FAX: 02 9534 0400 Riverwood, NSW, www.autolift.com.au 2210, Australia

AUTO LIFT
GARAGE DOORS & GATES