


Roller Door Type

Standard (all widths) & C2 Windlock (No Bars - Width to 3760 Only)	DTC Windlock Doors - 258 Windlock Spacing. *	DTC Windlock Doors - 172 Windlock Spacing. #
--	--	--

STEEL-LINE GARAGE DOORS

Date: 20/3/2023

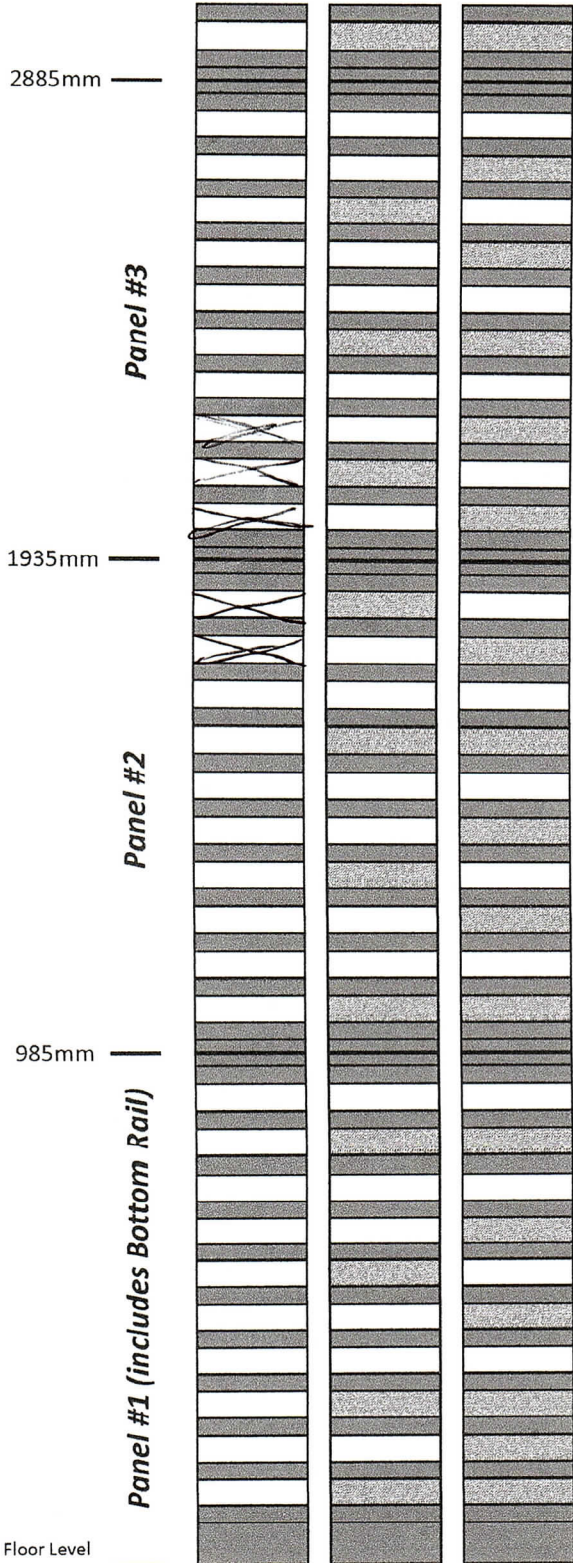

- Common Door Heights
- 3000mm Height
 - 2700mm Height
 - 2600mm Height
 - 2400mm Height
 - 2200mm Height
 - 2100mm Height

Prod'n #:
 Door Type & Size: Series A 2200h x 3090
 Color: Monument
 Branch/Cust/Client:
 Order #:

Notes

- Perforations are 100mm wide x 23mm high with pitch of 250mm and are spaced about the centre of panel.
- Standard & C2 Windlock (No Bars) start with pattern with a perforation in centre of curtain. The next rib up has 2 perforations equi-spaced about centre of curtain. This pattern is then repeated.
- DTC Windlock Doors have same pattern of perforations (perforation in centre of curtain) repeated on each available rib.
- Refer diagram on left for convex (external) ribs that can be perforated.
- The 10th rib in first panel cannot be perforated if a lock is fitted.
- Maximum perforation area is about 9% for standard doors 5.4% for 258 windlock spacing & 4.5% for 172 windlock spacing. This is equivalent to maximum ventilation possible.
- The full daylight opening height can be perforated. The wrap around drum is not perforated.
- For fully perforated door, just tick 'Fully Perforated' option.

Rib available for perforation. Mark with 'X' if the rib requires perforation.

Rib **not** available for perforation - contains windlock bar.

Valley & Lockseam Ribs that cannot be perforated.

Fully Perforated Roller Door (place tick or 'X' in box)

* This includes DTC C2 wind rated doors to 3.7m wide and DTC C1 wind rated doors from 3.7m to 5.3m wide.

This includes DTC C2 wind rated doors from 3.7m to 5.3m wide.

DTC = Deemed To Comply (Nth Territory Door approval)